



STPXXXS - B72/Vnh

440-460W 21.1%

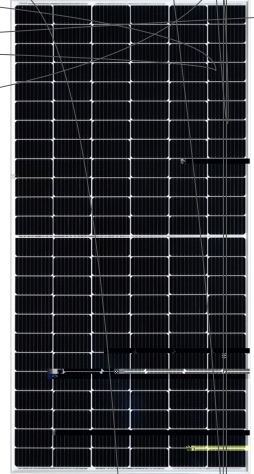

**

CE
IEC 61730
IEC 61215
SA 8000
IEC TS 62941
ISO 9001
ISO 14001
ISO 45001

2%



31

2079 x 1039 x 35
 (207.5 x 103.9 x 3.5)

Drainage
 B

STP460S-B72/Vnh
 IP68
 -40 ° C
 1500 V DC
 20 A
 0/+5 W

	STP460S-B72/Vnh		STP455S-B72/Vnh	
	STC	NMOT	STC	NMOT
(Pmax/W)	460	346.9	455	345.5
(Vmp/V)	41.8	38.5	41.6	38.4
(Imp/A)	11.01	9.00	10.94	8.94
(Voc/V)	49.6	46.5	49.4	46.3
(Isc/A)	11.74	9.47	11.67	9.42
%	21.1		20.9	

STC: 1000 W/m², 25 °C, AM1.5; NMOT: 800 W/m², 20 °C, AM1.5, 1 m/s Pmax +/- 3%

(NMOT)	42 ± 2 ° C
(Pmax)	-0.36%/° C
(Voc)	-0.304%/° C
(Isc)	0.050%/° C

	13	17.5
/	31	31
/	24	30
/	744	930
	2125 x 1130 x 1205	
	814	

